


Flat

Vertical - supplied with 3 brackets, 2 for the top and 1 for the bottom.
 Horizontal - supplied with 4 brackets, 2 for the top and 2 for the bottom.
 25mm tubular radiator cloaked with a steel cover.


Automatic bleed valve included with these radiators.

horizontal


Pipe centres left to right = width of radiator - 65mm
 Pipe centres from wall = 54mm
 Depth from wall = 88mm



single

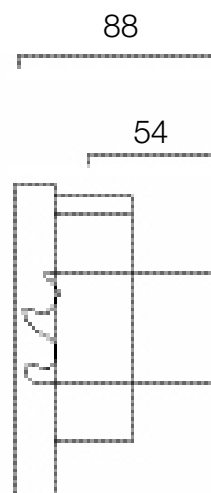


double

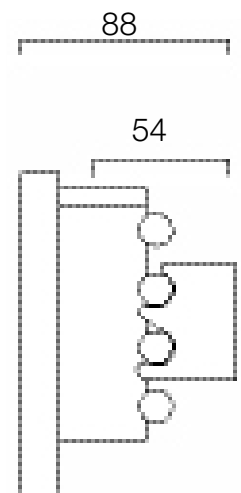


vertical

Pipe centres left to right = width of radiator + valves
 Pipe centres from wall = 54mm
 Depth from wall = 88mm


B2 connections must be specified at time of order.
 B2 pipe centres = width - 65mm

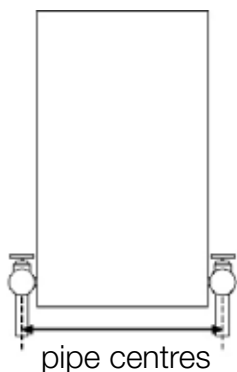

single

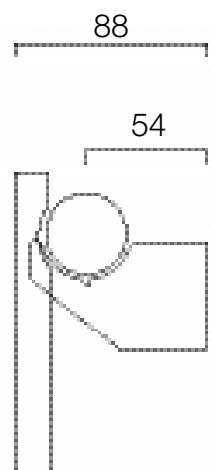

double

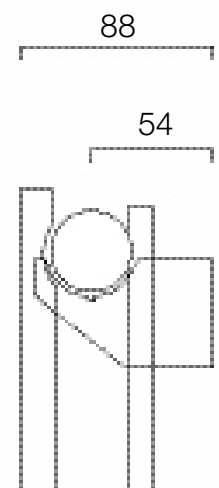

Important Note

The Radiator Company recommend that existing or new pipework is not adjusted until the radiator or towel rail is installed in its final position.

For further information please call us on:

01342 302250