

## Honey



Supplied with 6 brackets, 3 for the top and 3 for the bottom.  
Tubular radiator cloaked with high design panels.

Automatic bleed valve included with these radiators.

Pipe centres left to right = width of radiator + valves  
Pipe centres from wall: single = 47mm, double = 54mm  
Depth from wall: single = 125mm, double = 132mm

B2 connections must be specified at time of order  
B2 pipe centres = width - 75mm

**Important Note:** The Honey is particularly heavy and is supplied with four installation handles. Once the hanging brackets are fixed, four people are required to hang the radiator to reduce the risk of damaging the hexagonal panels.

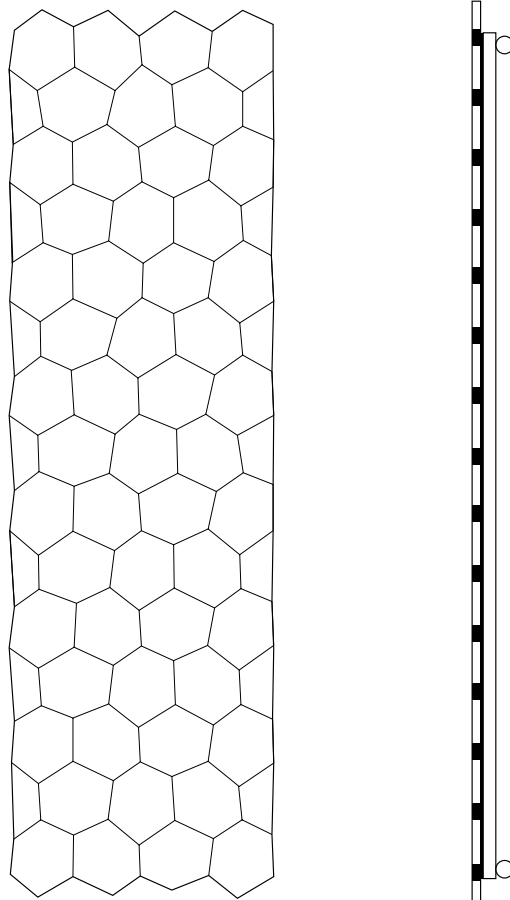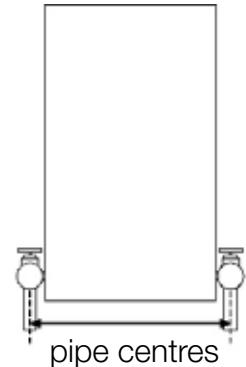

### Important Note

The Radiator Company recommend that existing or new pipework is not adjusted until the radiator or towel rail is installed in its final position.

For further information please call us on:

01342 302250