

TRC 16

Supplied with 4 brackets - 2 for the top and 2 for the bottom.
35mm collectors.
16mm cross tubes.

Automatic bleed valve included with these radiators.

horizontal




Pipe centres left to right = width of radiator - 50mm
Pipe centres from wall: single: 30mm - 40mm, double = 80mm - 90mm
Depth from wall: single: 65mm - 75mm, double: 111mm - 121mm

single

double

65 - 75
30 - 40

111 - 121
80 - 90



vertical

Pipe centres left to right = width of radiator + valves
Pipe centres from wall: single = 49mm, double = 55mm
Depth from wall: single = 82mm, double = 86mm




B2 connections must be specified at time of order
B2 pipe centres = width - 75mm

single

double

82
49

86
55

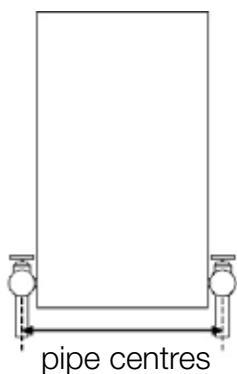

Important Note

The Radiator Company recommend that existing or new pipework is not adjusted until the radiator or towel rail is installed in its final position.

For further information please call us on:

01342 302250