

TreO

Supplied with 3 brackets, 2 for the top and 1 for the bottom.
25mm tubular radiator cloaked with a steel cover.

Automatic bleed valve included with these radiators.




Pipe centres left to right = width of radiator + valves

Pipe centres from wall = 54mm

Depth from wall = 98mm

B2 connections must be specified at time of order

B2 pipe centres = width - 110mm

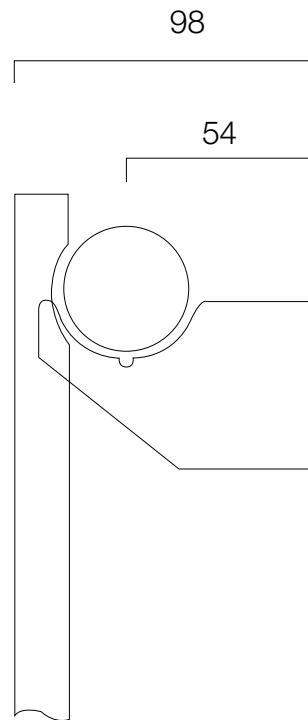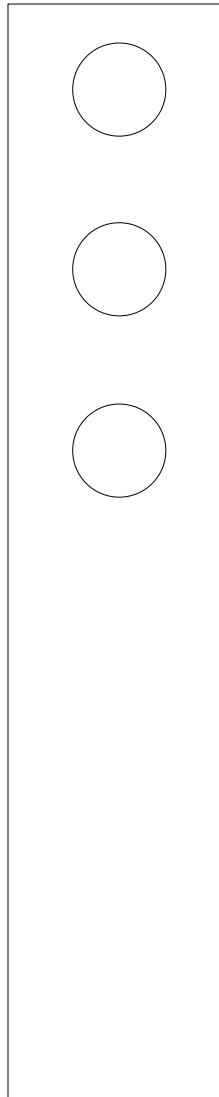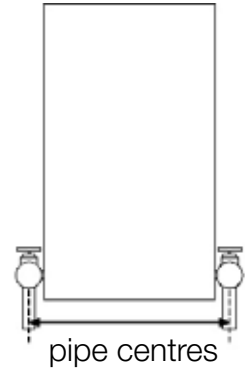

Important Note

The Radiator Company recommend that existing or new pipework is not adjusted until the radiator or towel rail is installed in its final position.

For further information please call us on:

01342 302250